



A900.12 rechargeable batteries

Tape length is programmable in millimetre increments. 12 different lengths can be stored. The preset lengths can be selected with the "select" key, or dispensed (processed) consecutively through the automatic cycle. In addition, the quantity of the lengths to be dispensed can be programmed.

Technical data:

- | | |
|-----------------------|-------------------------------|
| - Length adjustment | keypad |
| - Memory | 12 tape lengths can be stored |
| - Special feature | sequential work is possible |
| - Anti-static housing | yes |
| - Strip width | min 8 mm max 60 mm |
| - Tape length | min 5 mm max 999 mm |
| - Roll diameter | max 300 mm |

Power supply:

- 24V DC 3,3 AH
- AC 100V, 120V, 100-240V/41W

Dimensions:

Depth 250 mm, width 250 mm, height 230 mm
Weight: 5.6 kg

A900.6 rechargeable batteries

Tape length is programmable in millimetre increments. 6 different lengths can be stored. The preset lengths can be selected with the "select" key, or dispensed (processed) consecutively through the automatic cycle. In addition, the quantity of the lengths to be dispensed can be programmed.

Technical data:


- | | |
|-----------------------|------------------------------|
| - Length adjustment | keypad |
| - Memory | 6 tape lengths can be stored |
| - Special feature | sequential work is possible |
| - Anti-static housing | yes |
| - Strip width | min 8 mm max 60 mm |
| - Tape length | min 5 mm max 999 mm |
| - Roll diameter | max 300 mm |

Power supply:

- 24V DC 3,3 AH
- AC 100V, 120V, 100-240V/41W


Dimensions:

Depth 250 mm, width 250 mm, height 230 mm
Weight: 5.6 kg



BACHMANN GmbH
VERBINDUNGSTECHNIK

Zollerstrasse 6-10
72379 Hechingen Germany
Telephone: +49 (0)7471 984580
Fax: +49 (0)7471 9845817
Email: info@bachmanngmbh.de
www.bachmanngmbh.de



BACHMANN GmbH
VERBINDUNGSTECHNIK



AccuDevices



A 521.60 rechargeable batteries

All common and special self-adhesive labels can be dispensed quickly and easily with the A521.60 rechargeable batteries label dispenser.

Scanning is photoelectric. Dispensing rates and label feed rates are continuously adjustable.

The built-in counter indicates how many labels you have already removed.

Technical data:


- Labels of 20-60 mm width,
- Photoelectric scanning
- Stock roll carrier for rolls of up to 250 mm outer diameter
- Cut-off speed and label speed can be regulated
- Counting function
- Digital display
- Powered by rechargeable batteries

Power supply:

- 12V DC 3,3AH
- AC 100V, 100-240V/41W

Dimensions:

Depth: 230 mm, width: 250 mm, height: 180 mm
Weight: 4.0 kg

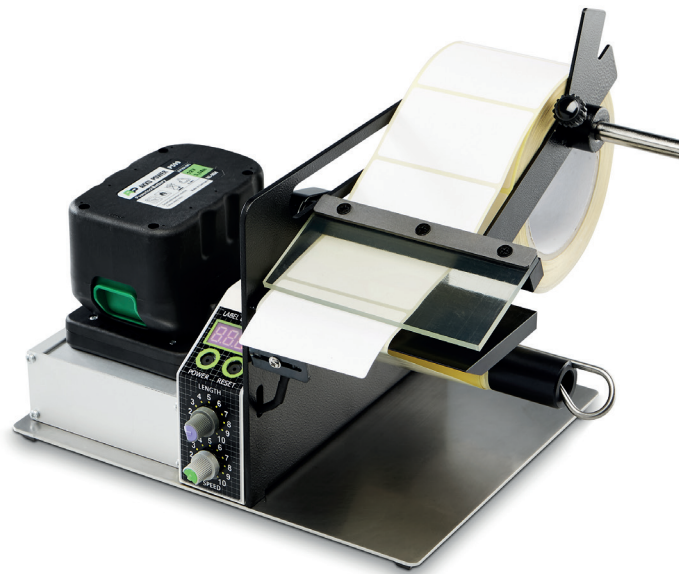

A 521.120 rechargeable batteries

All common and special self-adhesive labels can be dispensed quickly and easily with the A521.120 rechargeable batteries label dispenser.

Scanning is photoelectric. Dispensing rates and label feed rates are continuously adjustable.

The built-in counter indicates how many labels you have already removed.

Technical data:


- Labels of 20-120 mm width,
- Photoelectric scanning
- Stock roll carrier for rolls of up to 250 mm outer diameter
- Cut-off speed and label speed can be regulated
- Counting function
- Digital display
- Powered by rechargeable batteries

Power supply:

- 12V DC 3,3AH
- AC 100V, 100-240V/41W

Dimensions:

Depth: 250 mm, width: 300 mm, height: 180 mm
Weight: 4.25kg

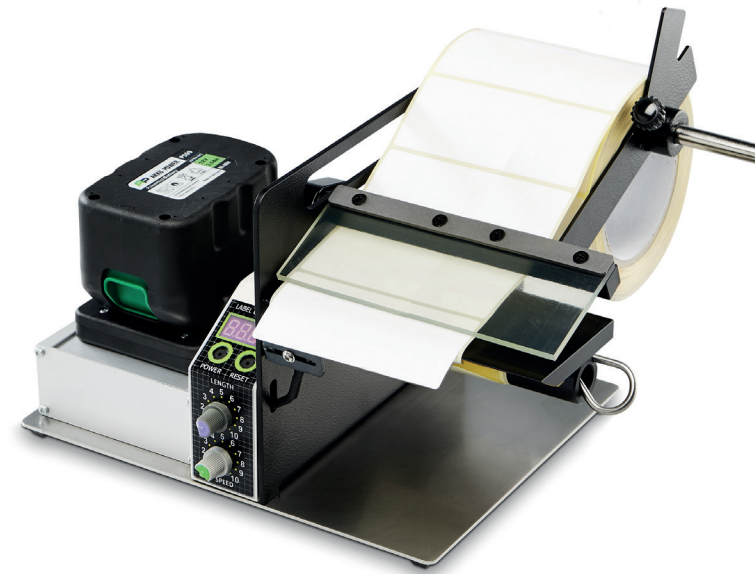

A 521.180 rechargeable batteries

All common and special self-adhesive labels can be dispensed quickly and easily with the A521.180 rechargeable batteries label dispenser.

Scanning is photoelectric. Dispensing rates and label feed rates are continuously adjustable.

The built-in counter indicates how many labels you have already removed.

Technical data:

- Labels of 20-180 mm width,
- Photoelectric scanning
- Stock roll carrier for rolls of up to 250 mm outer diameter
- Cut-off speed and label speed can be regulated
- Counting function
- Digital display
- Powered by rechargeable batteries

Power supply:

- 12V DC 3,3AH
- AC 100V, 100-240V/41W

Dimensions:

Depth: 260 mm, width: 380 mm, height: 230 mm
Weight: 5.7 kg