



### A683.200

Automatic cutting of textile, plastic or metal tapes.  
Possible areas of use: stranded wire of up to 35.0 mm<sup>2</sup> or solid wires of up to approx. 10 mm<sup>2</sup> ribbon cables up to a maximum width of 200 mm protective tubes, PVC hoses, shrink tubes and many other materials. Parameters can be managed easily using 100 internally stored programs. The program is easily selected via the membrane keypad and using the storage number. Function keys for "material feed" and "absolute cut" individual steps make it easy to change machine settings.

#### Technical data

Cutting width	max. 200 mm
Material thickness	max. 12mm
Cutting capacity	stranded wire up to 35 mm <sup>2</sup>
Cutting length	0.1 mm to 99.999 m
Accuracy	0.2 +- 0.002 x cutting length
Working capacity	for 100mm length, 100 pieces per minute
Feed	adjustable in 9 stages
Programme storage	100 internal memories
Connected load	230V / 50 Hz - 250KW

**Dimensions:**  
Depth 600 mm, width 370 mm, height 350mm  
Weight: 38kg



### A619.02

The following additional functions that can be controlled with the "start" key,  
- if the start key is red, set-up can be performed step by step  
- if start key is held down for two seconds, it changes to blue = programme: tapes are cut up to the photocell  
- when the adhesive tape is removed, the next will be dispensed up to the photocell  
- if start key is held down for two seconds, then released, it changes to purple =  
- programme: Adhesive tape is dispensed up to the photocell  
Remove section and release a new one

#### Technical data:


Length adjustment	mechanical/scale
Tape width	min. 3mm max. 20mm
Tape length	min. 9mm, max. 61mm
Max. roll diameter	150 mm

**Dimensions:**  
Depth 250 mm, width 150 mm, height 150 mm  
Weight: 2.1 kg



**BACHMANN** GmbH  
VERBINDUNGSTECHNIK

Zollerstrasse 6-10  
72379 Hechingen Germany  
Telephone: +49 (0)7471 984580  
Fax: +49 (0)7471 9845817  
Email: [info@bachmannmbh.de](mailto:info@bachmannmbh.de)  
[www.bachmannmbh.de](http://www.bachmannmbh.de)



**BACHMANN** GmbH  
VERBINDUNGSTECHNIK



Tape dispensers



**A 612.80-6**

Industrial tape dispenser with electrical drive for cold adhesive tapes from 15 mm to 80 mm wide. The length is adjustable in millimetre increments from 60 mm to 999 mm. With automatic triggering of the removal of the adhesive tape or continuous operation.

Technical data:	
Length adjustment	mechanical keypad
Tape width	min. 15mm max. 80mm
Tape length	min. 60mm max. 999 (9999)mm
Max. roll diameter	150 mm / 250 mm

**Dimensions:**  
Depth 250mm, width 190mm, height 295mm  
Weight: 11 kg

**Option:**  
with 4 digits, i.e. 9999 mm




**A 612.80-6 with A300 friction pre-removal**

Friction pre-removal for tapes that are hard to remove. With Stop + Go function. The A300 supports the removal of the tape using a knurled steel roller in continuous operation or machine-controlled.

Technical data:	
Length adjustment	mechanical keypad
Tape width	min. 15mm max. 80mm
Tape length	min. 60mm max. 999 (9999)mm
Max. roll diameter	200 mm

**Dimensions:**  
Depth 470 mm, width 250 mm, height 520 mm  
Weight with machine: 20 kg

**Option:**  
with 4 digits, i.e. 9999 mm

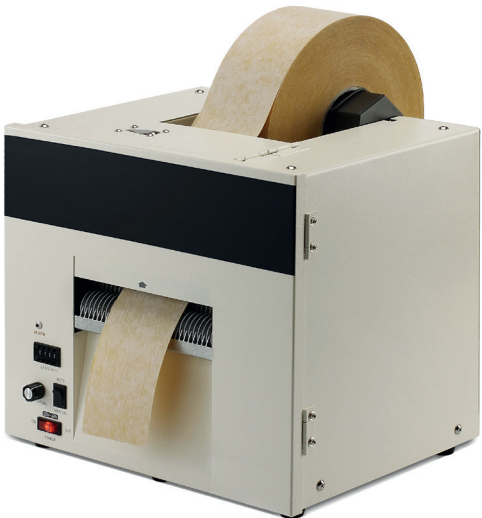

**A 612/150**

Industrial tape dispenser with electrical drive for cold adhesive tapes from 15 mm to 150 mm wide. The length is adjustable in millimetre increments from 80 mm to 9999 mm. With automatic triggering of the removal of the adhesive tape or continuous operation.

Technical data:	
Length adjustment	mechanical keypad
Tape width	min. 15mm max. 150mm
Tape length	min. 80mm max. 9999mm
Max. roll diameter	200 mm

**Dimensions:**  
Depth 260 mm, width 330 mm, height 295 mm  
Weight: 16 kg



**A612/250**

Industrial tape dispenser with electrical drive for cold adhesive tapes from 15 mm to 250 mm wide. The length is adjustable in millimetre increments from 80 mm to 9999 mm. With automatic triggering of the removal of the adhesive tape or continuous operation.

Technical data:	
Length adjustment	mechanical keypad
Tape width	min. 15mm max. 250mm
Tape length	min. 80mm max. 9999mm
Max. roll diameter	200 mm

**Dimensions:**  
Depth 260 mm, width 440 mm, height 295 mm  
Weight: 22 kg